



## Desktop Printers & Labels

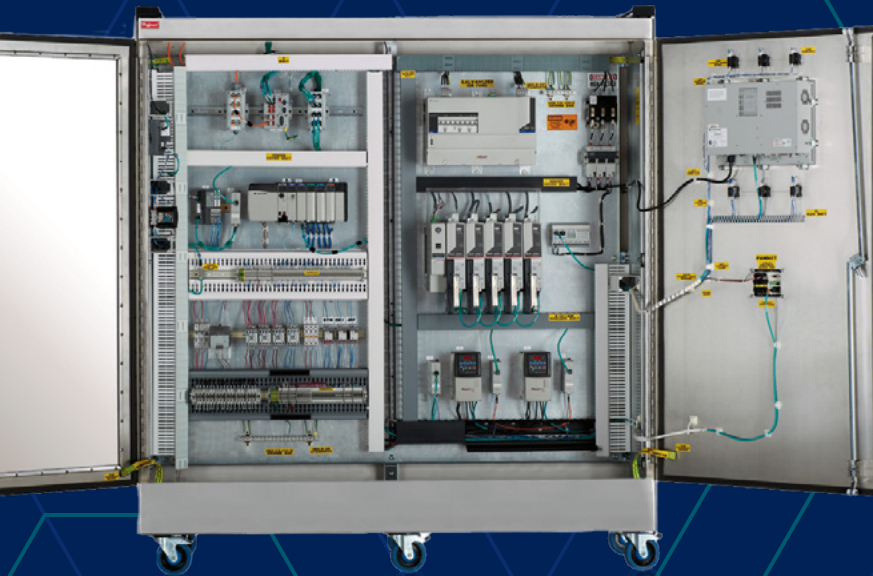


Panduit is a global leader in reliable and innovative solutions for identification and safety.

Products are engineered for a wide variety of industries and applications—including electrical, electronics, industrial, and network.

Panduit offers a complete, leading-edge line of labeling software, high-performance label materials (all RoHS compliant), and printers that provide enhanced productivity, dependability, and value to all infrastructure labeling requirements.

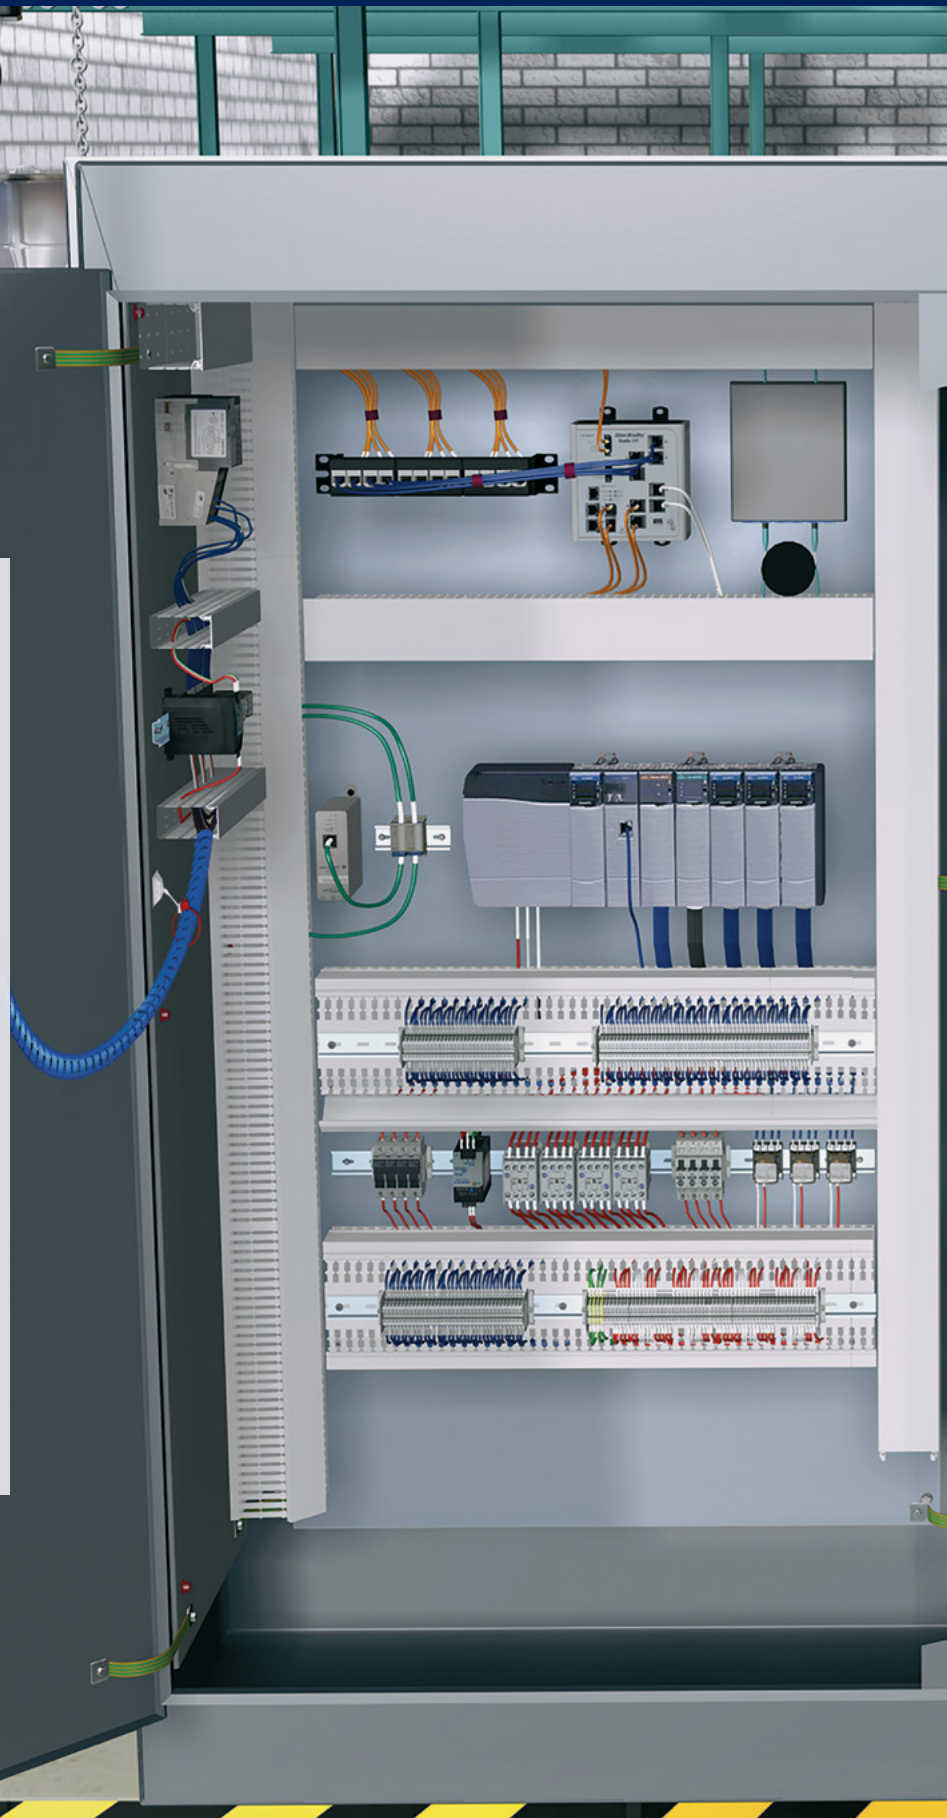



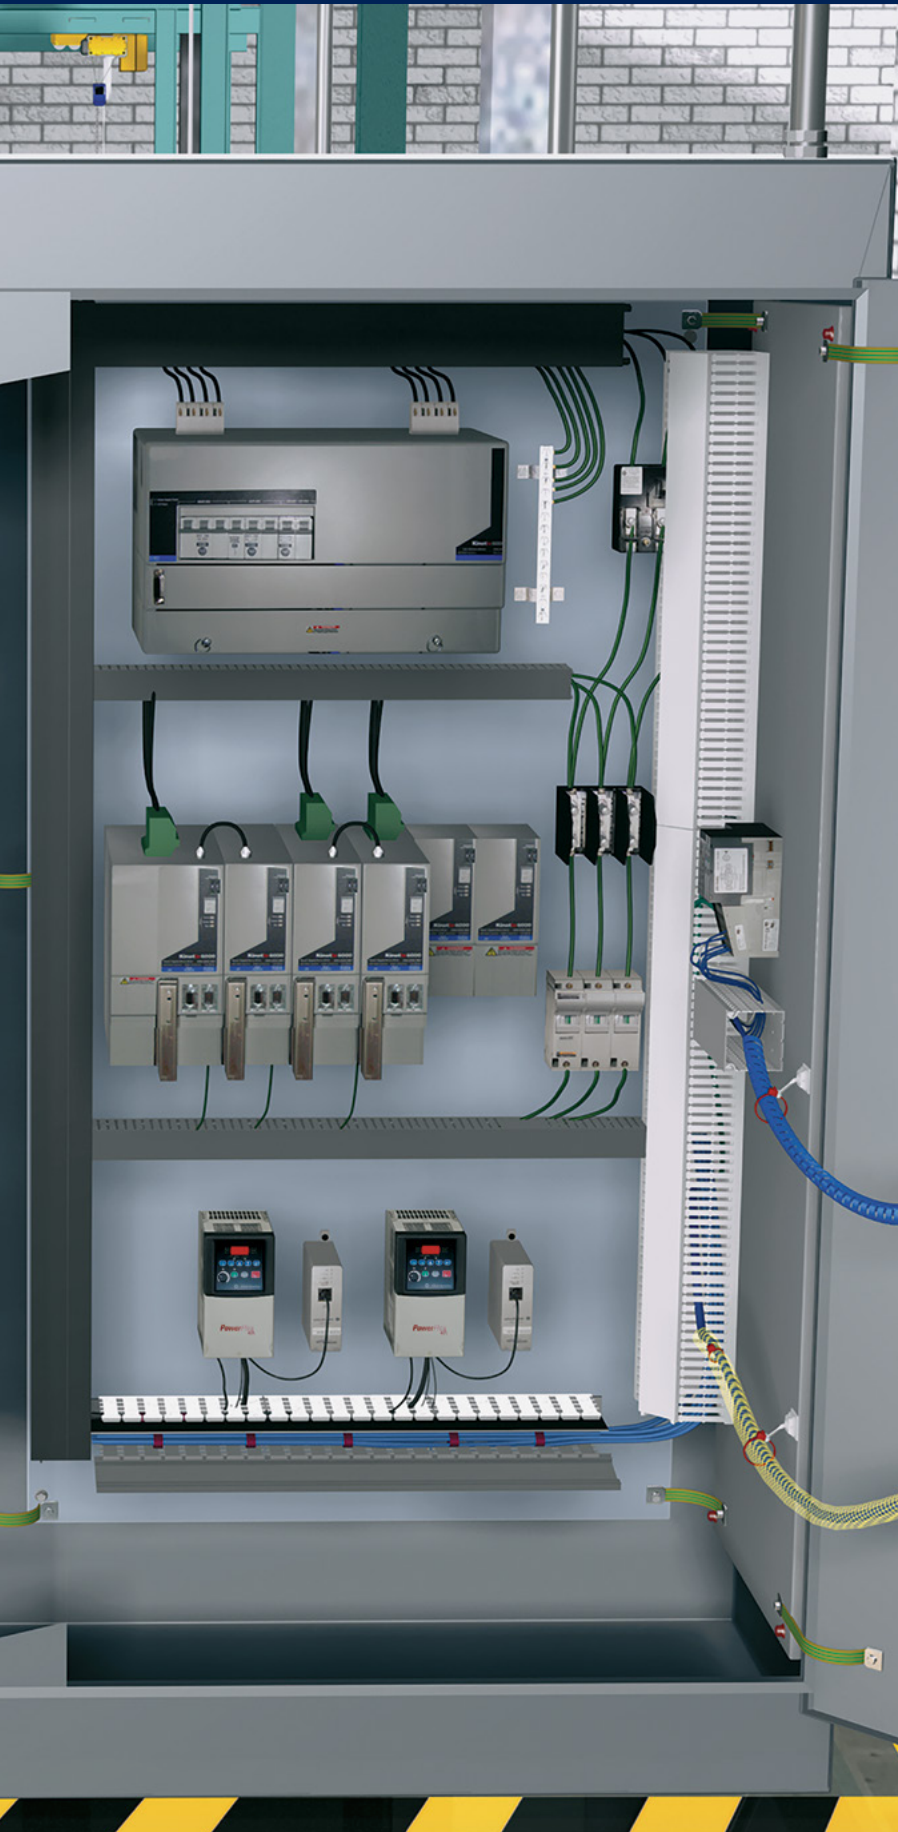

**Printers/Accessories/Software**

Medium Volume Desktop Printer & Accessories . . . . . 4  
 High Volume Desktop Printers & Accessories . . . . . 5  
 Easy-Mark Plus™ Labeling Software . . . . . 6

**Cable/Wire Labels**

Turn-Tell® Labels . . . . . 7  
 Vinyl Self-Laminating Labels . . . . . 8-9  
 Tedlar™ Self-Laminating Labels . . . . . 10  
 LabelCore™ Fiber Optic Cable Identification System . . . . . 11  
 Flag Labels . . . . . 12  
 Vinyl Cloth Labels . . . . . 13  
 Non-Laminated Nylon Cloth Labels . . . . . 13

**Marker Plates**

High-Temperature Flame-Retardant Marker Plates 14  
 Halogen-Free Flame-Retardant Marker Plates . . . . . 14  
 Standard Marker Plates . . . . . 15

**Heat Shrink Labels**

Military Grade – Single-Sided Labels . . . . . 16-17  
 Military Grade – Two-Sided Labels . . . . . 18-19  
 Halogen-Free – Two-Sided Labels . . . . . 20

**Component Labels/Continuous Tapes**

Raised Panel Labels . . . . . 21  
 Raised Panel Half Push Button Labels . . . . . 22  
 Raised Panel Pre-Printed Emergency Stop Labels . . . 22  
 Raised Panel Component Labels . . . . . 23  
 Polyester Component Labels . . . . . 24  
 Super-Tack Polyester Component Labels . . . . . 25  
 Tedlar® Component Labels . . . . . 25  
 Non-Adhesive Polyester Component Labels . . . . . 26  
 Vinyl Cloth Component Labels . . . . . 26  
 Polyimide Component Labels . . . . . 27  
 Reflective Continuous Tapes . . . . . 27  
 Super-Tack Polyester Continuous Tapes . . . . . 28  
 Continuous Tapes . . . . . 29  
 Non-Printable Clear Over-Laminate Continuous Tape . . . . . 30

**Safety and Solar Labels**

Super-Tack Polyester Arc Flash Labels . . . . . 30  
 Raised Panel Arc Flash Labels . . . . . 30  
 Super-Tack Arc Flash Continuous Tapes . . . . . 31  
 Super-Tack Polyester Facility Identification Labels . . 31  
 Raised Panel Solar Labels . . . . . 31

Tedlar is a registered trademark of E.I. du Pont de Nemours and Company.

## Medium Volume Desktop Printer and Accessories

- 300 dots per inch (dpi) print resolution
- Durable construction allows use in harsh environments, industrial facilities, and job sites
- Easy-Mark Plus™ Labeling Software included with printer
- Up to 5.9 inches per second print speed
- Compact, lightweight design
- Convenient, easy setup; quickly begin producing labels for all industrial infrastructure applications
- Connects quickly and easily to PC, and offers connectivity flexibility to print by USB, parallel serial, or Ethernet
- Quick and easy loading of label and ribbon media



Part Number	Description	Std. Pkg. Qty.
<b>DP4300M</b>	300 dpi printer; includes printer, Easy-Mark Plus Labeling Software, RMEH4BL black hybrid ribbon, USB cable, quick start guide, and U.S. power cord; for use in North America.	1
<b>DP4300M/E</b>	300 dpi printer; includes printer, Easy-Mark Plus Labeling Software, RMEH4BL black hybrid ribbon, USB cable, quick start guide, and power cords for Euro, Swiss, UK, China, and Australia; for use outside of North America.	
<b>DP4300M-KIT</b>	DP4300M printer kit. Includes: printer, Easy-Mark Plus Labeling Software, RMEH4BL black hybrid ribbon, USB cable, quick start guide, U.S. power cord; TDP43ME-RS Roll Stand, DP4300M-CASE, and one roll of S100X150VATY labels; for use in North America.	
<b>DP4300M/E-KIT</b>	DP4300M/E printer kit. Includes: printer, Easy-Mark Plus Labeling Software, RMEH4BL black hybrid ribbon, USB cable, quick start guide, power cords for Euro, Swiss, UK, China, and Australia, TDP43ME-RS Roll Stand, DP4300M-CASE, and one roll of S100X150VATY labels; for use outside of North America.	
<b>DP4300M-CUT</b>	Optional power/automatic cutter for DP4300M thermal transfer desktop printer.	
<b>DP4300M-PCUT</b>	Optional power/automatic perforation cutter for DP4300M thermal transfer desktop printer.	
<b>DP4300M-CASE</b>	Hardside carrying case for printer and accessories.	
<b>TDP43ME-RS</b>	External label roll stand for TDP43ME printer; used to rear feed labels that are supplied on 3 in. cores.	
<b>DP-WIFI</b>	USB WLAN Stick for DP Printers, 802.11b/g/n 2.4GHz + a/n/ac 5GHz	
<b>PTR-CLN</b>	Printer cleaning kit – contains (1) cleaning pen, (8) cleaning solution soaked wipes, (8) foam swabs pre-saturated with cleaning solution, MSDS, and cleaning instructions.	

## Medium Volume Desktop Printer Ribbons

Part Number	Description	Width In. (mm)	Length Ft. (m)	Std. Pkg. Qty.
<b>RMER1BL</b>	Black resin thermal transfer ribbon. Use with terminal block markers.	1.1 (27.9)	300.0 (91.4)	1
<b>RMEH4BL*</b>	Black hybrid thermal transfer ribbon. Use with heat shrink, self-laminating, Turn-Tell®, tan polyimide labels, and vinyl cloth labels.	4.25 (108.0)		
<b>RMER4BL*^</b>	Black resin thermal transfer ribbon. Use with polyester labels, continuous vinyl tape, marker plates, and raised panel labels.			
<b>RMER4BL-A</b>	Black resin thermal transfer ribbon. Use with high-temperature marker plates.			
<b>RMER4BL-C</b>	Black resin thermal transfer ribbon. Use with fluid-resistant heat shrink labels and white polyimide labels.			

Order number of ribbons required in multiples of Standard Package Quantity.

\*For 2.5 in. wide ribbons, replace 4 in part number with 2. For example, the part number of a 2.5 in. wide black hybrid thermal transfer ribbon is RMEH2BL.

^Other colors available, change "BL" to: BU for Blue, RD for Red, or WH for White (Example: RMER4BU = Blue Resin Ribbon).

## High Volume Desktop Printers and Accessories

- Convenient, easy setup; quickly begin producing labels
- Rugged, durable design for printing in all environments
- Up to 11.8 inches per second print speed
- Superior print quality for all type of labels
- Easy to use large color touchscreen with intuitive interface
- Minimize setup time to switch label and ribbon rolls, maximize uptime
- Easy-Mark Plus™ Labeling Software included with printer
- Connect quickly and easily to PC, and offers connectivity flexibility to print by USB, parallel, Ethernet or serial
- H versions available with 300 or 600 dots per inch print resolution
- HD version allows two-sided labels in one pass to reduce printing time by 50%
- UL60950 listed, File # E165747



Part Number	Description	Std. Pkg. Qty.
<b>DP4300H AND DP4600H PRINTERS</b>		
<b>DP4300H</b>	300 dpi printer; includes printer, Panduit Easy-Mark Plus™ Labeling Software, RHEH4BL black hybrid ribbon, USB cable, quick start guide, and U.S. power cord; for use in North America.	1
<b>DP4300H/E</b>	300 dpi printer; includes printer, Panduit Easy-Mark Plus™ Labeling Software, RHEH4BL black hybrid ribbon, USB cable, quick start guide, and UK, Germany, Switzerland, and China power cords; not for use in North America.	
<b>DP4600H</b>	600 dpi printer; includes printer, Panduit Easy-Mark Plus™ Labeling Software, RHEH4BL black hybrid ribbon, USB cable, quick start guide, and U.S. power cord; for use in North America.	
<b>DP4600H/E</b>	600 dpi printer; includes printer, Panduit Easy-Mark Plus™ Labeling Software, RHEH4BL black hybrid ribbon, USB cable, quick start guide, and UK, Germany, Switzerland, and China power cords; not for use in North America.	
<b>DP4300HD PRINTER</b>		
<b>DP4300HD</b>	300 dpi printer; includes printer, Panduit Easy-Mark Plus Labeling Software, 2 rolls of RHEH4BL black hybrid ribbon, USB cable, quick start guide, and U.S. power cord; for use in North America.	1
<b>DP4300HD/E</b>	300 dpi printer; includes printer, Panduit Easy-Mark Plus Labeling Software, 2 rolls of RHEH4BL black hybrid ribbon, USB cable, quick start guide, and UK, Germany, Switzerland, and China power cords; not for use in North America.	
<b>PRINTER ACCESSORIES</b>		
<b>PTR-CLN</b>	Printer cleaning kit – contains (1) cleaning pen, (8) cleaning solution soaked wipes, (8) foam swabs pre-saturated with cleaning solution, MSDS, and cleaning instructions.	1
<b>DP4X00H-CUT</b>	Optional power/automatic cutter for DP4300H, DP4600H, and DP4300HD thermal transfer desktop printers.	
<b>DP4X00H-PCUT</b>	Optional power/automatic perforation cutter for DP4300H, DP4600H, and DP4300HD thermal transfer desktop printers.	
<b>TDP43ME-RS</b>	External label roll stand for use with continuous tapes	

## High Volume Desktop Printers Ribbons

Part Number	Description	Width In. (mm)	Length Ft. (m)	Std. Pkg. Qty.
<b>RHEH4BL</b>	Black hybrid thermal transfer ribbon. Use with heat shrink, self-laminating, Turn-Tell®, and vinyl cloth and tan polyimide labels.	4.33 (110.0)	1181.0 (363.0)	1
<b>RHER4BL</b>	Black resin thermal transfer ribbon. Use with polyester labels, continuous vinyl tape, marker plates, and raised panel labels.			
<b>RHER4WH</b>	White resin thermal transfer ribbon. Use with polyester labels, continuous vinyl tape, marker plates, and raised panel labels.	4.50 (114.3)		
<b>RHER4BL-A</b>	Black resin thermal transfer ribbon. Use with high-temperature marker plates.	4.33 (110.0)		
<b>RHER4BL-C</b>	Black resin thermal transfer ribbon. Use with fluid resistant heat shrink markers and white polyimide labels.			
<b>RHER4BL-E</b>	Black resin thermal transfer ribbon. Used with standard marker plates and component labels for extra durability for harsh environments.			

Order number of ribbons required in multiples of Standard Package Quantity.

## Easy-Mark Plus™ Labeling Software PATENTED

- Powerful, easy-to-use, and affordable software that provides innovative features and functionality to address unique labeling needs
- Quickly create simple or complex labels with text boxes, lines, frames, or tables, and other useful tools
- Design detailed labels with multiple zones and objects for applications such as rating plates, arc flash labels, and fiber optic enclosures
- Simple user interface shows labels on the screen as they will be printed
- Create and print labels using QR codes, or any of the other 21 included barcode symbologies
- Upgrades available at [on our website](#)



### System Requirements:

- 300 MB hard drive space and 2 GB Memory
- Windows 7, 8, 8.1, 10 or 11
- 32 or 64 bit operating systems
- Microsoft.NET Framework 2.0 or higher
- Mouse or compatible pointing device
- Keyboard
- Optical Disc Drive or USB Port

Part Number	Description	Std. Pkg. Qty.	Std. Ctn. Qty.
EMPLUS-CD	Easy-Mark Plus™ Labeling Software, CD-ROM.		
EMPLUS-DL	Easy-Mark Plus™ Labeling Software, online download.*	1	10
EMPLUS-2GO	Easy-Mark Plus™ Portable Application, USB flash drive.		
EMPLUS-SERVER	Easy-Mark Plus™ Labeling Software, networkable server based version.		

<sup>^</sup>Windows is a registered trademark of Microsoft Corp. in the United States and/or other countries.

<sup>\*</sup>Customer will receive a DVD Case with information and serial number for the downloadable version.

**Turn-Tell® Labels** **PATENTED**

- Allows labels to rotate for visibility from any angle, and allows repositioning on the wire/cable to align legends for improved aesthetics
- Ideal for use in high-density or space-constrained cable applications
- Use thermal transfer hybrid ribbons shown on pages 4 and 5
- Temperature range: -40°F to 150°F (-40°C to 66°C)
- Not recommended for use with LabelCore Fiber Optic Cable Identification System Sleeves.



Part Number	Print-On Area Color	Width In. (mm)	Length In. (mm)	Print-On Area Height In. (mm)	Min Cable O.D. In. (mm)	Max Cable O.D. In. (mm)	Wire Range	Labels Per Row	Std. Pkg. Qty.
R050X075V1T	White	0.50 (12.7)	0.75 (19.1)	0.25 (6.4)	0.12 (3.1)	0.16 (4.1)	Cat. 6 28 AWG/ 18 – 14 AWG	8	5000
R050X125V1T			1.25 (31.8)	0.38 (9.7)	0.16 (4.1)	0.22 (5.6)	Cat. 3 UTP/12 – 10 AWG		
R050X150V1T			1.50 (38.1)	0.50 (12.7)	0.22 (5.6)	0.28 (7.1)	Cat. 5e UTP/Cat. 6 UTP/ Cat. 6A UTP/Cat. 5e FTP/ 10 – 6 AWG		
R100X075V1T	TIA Blue	1.00 (25.4)	0.75 (19.1)	0.25 (6.4)	0.12 (3.1)	0.16 (4.1)	Cat. 6 28 AWG/ 18 – 14 AWG	4	2500
<b>BEST SELLER</b> R100X125V1T			1.25 (31.8)	0.38 (9.7)	0.16 (4.1)	0.22 (5.6)	Cat. 3 UTP/12 – 10 AWG		
R100X150V1T									
R100X150V2T	TIA Blue								
R100X150V3T	TIA Green		1.50 (38.1)	0.50 (12.7)	0.22 (5.6)	0.28 (7.1)	Cat. 5e UTP/Cat. 6 UTP/ Cat. 6A UTP/		
<b>FEATURED</b> R100X150V7T	TIA Red								
R100X150V8T	TIA Yellow								
R100X225V1T	White								
R100X225V2T	TIA Blue								
R100X225V3T	TIA Green		2.25 (57.2)	0.75 (19.1)	0.28 (7.1)	0.39 (9.9)	Cat. 6 FTP/Cat. 6 UTP/ Cat. 6A FTP/8-4 AWG		
R100X225V7T	TIA Red								
<b>FEATURED</b> R100X225V8T	TIA Yellow								
R100X400V1T			4.00 (101.6)	1.00 (25.4)	0.39 (9.9)	0.95 (24.1)	2 – 1 AWG		
R150X150V1T	White	1.50 (38.1)	1.50 (38.1)	0.50 (12.7)	0.22 (5.6)	0.28 (7.1)	Cat. 5e UTP/Cat. 6 UTP/ Cat. 6A UTP/Cat. 5e FTP/ 10 – 6 AWG	2	1000
<b>FEATURED</b> R200X150V1T		2.00 (50.8)	2.25 (57.2)	0.75 (19.1)	0.28 (7.1)	0.39 (9.9)	Cat. 6 FTP/Cat. 6A UTP/ Cat. 6A FTP/8 – 4 AWG	4	
R200X225V1T		4.00 (101.6)	1.00 (25.4)	0.39 (9.9)	0.95 (24.1)	2 – 1 AWG	2		

Order number of labels required in multiples of Standard Package Quantity.  
 Labels are roll mounted on 3.00 in. cores; when using the DP4300M printer and 3.00 in. cores, the roll stand (TDP43ME-RS) is required.



## Vinyl Self-Laminating Labels

- Includes a colored print-on area and clear overlamine to protect the legend for clear and durable identification
- Sized specifically for wire and cable applications
- Thin and conformable; preferred material for most general wire/cable labeling
- Use thermal transfer hybrid ribbons shown on pages 4 and 5
- Temperature range: -40°F to 150°F (-40°C to 66°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15-01, File # MH14979





















Part Number	Print-On Area Color	Width In. (mm)	Length In. (mm)	Print-On Area Height In. (mm)	Min Cable O.D. In. (mm)	Max Cable O.D. In. (mm)	Wire Range	Labels Per Row	Std. Pkg. Qty.
<b>FEATURED</b> S050X075VA1Y	White	0.50 (12.7)	0.75 (19.1)	0.25 (6.4)	0.08 (2.0)	0.16 (4.1)	Cat. 6 28 AWG/ 18 – 14 AWG	8	5000
<b>FEATURED</b> S050X075VATY*									
<b>FEATURED</b> S050X125VA1Y			1.25 (31.8)	0.38 (9.7)	0.12 (3.1)	0.28 (7.0)	Cat. 3 UTP/ 12 - 10 AWG		
<b>FEATURED</b> S050X125VATY*									
<b>FEATURED</b> S050X150VA1Y			1.50 (38.1)	0.50 (12.7)	0.16 (4.1)	0.32 (8.1)	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG		
<b>FEATURED</b> S050X150VATY*									
<b>S050X250VATY*</b>			2.50 (63.5)	1.00 (25.4)	0.32 (8.1)	0.48 (12.1)	6 – 2 AWG		
<b>S075X075VATY*</b>	White	0.75 (19.1)	0.75 (19.1)	0.25 (6.4)	0.08 (2.0)	0.16 (4.1)	Cat. 6 28 AWG/ 18 – 14 AWG	5	
<b>FEATURED</b> S075X100VATY*									
<b>S075X125VATY*</b>			1.25 (31.8)						
<b>FEATURED</b> S075X150VATY*			1.50 (38.1)	0.50 (12.7)	0.16 (4.1)	0.32 (8.1)	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG		
<b>FEATURED</b> S100X075VA1Y			1.00 (25.4)	0.75 (19.1)	0.25 (6.4)	0.08 (0.20)	0.16 (4.1)		
<b>FEATURED</b> S100X075VATY*	5000								
<b>FEATURED</b> S100X125VA1Y	1.25 (31.8)	0.38 (9.7)		0.12 (3.1)	0.28 (7.0)	Cat. 3 UTP/ 12 - 10 AWG	2500		
<b>BEST SELLER</b> S100X125VATY*							5000		
<b>BEST SELLER</b> S100X150VA1Y	1.50 (38.1)	0.50 (12.7)		0.16 (4.1)	0.32 (8.1)	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/ 10 - 6 AWG	4	2500	
<b>FEATURED</b> S100X150VATY*								5000	
<b>S100X150VBTY*</b>								TIA Blue	
<b>S100X150VDTY*</b>	TIA Green							5000	
<b>S100X150VFTY*</b>	TIA Orange								

Order number of labels required in multiples of Standard Package Quantity.

\*Labels are roll mounted on 3.00 in. cores; when using the DP4300M printer and 3.00 in. cores, the roll stand (TDP43ME-RS) is required.



Vinyl Self-Laminating Labels (continued)


Part Number	Print-On Area Color	Width In. (mm)	Length In. (mm)	Print-On Area Height In. (mm)	Min Cable O.D. In. (mm)	Max Cable O.D. In. (mm)	Wire Range	Labels Per Row	Std. Pkg. Qty.			
S100X150VHTY*	TIA Red	1.00 (25.4)	1.50 (38.1)	0.50 (12.7)	0.16 (4.1)	0.32 (8.1)	Cat. 5e UTP/ Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	4	5000			
S100X150VITY*	TIA Yellow											
 S100X150V9TY*	Gold											
 S100X225VA1Y	White		2.25 (57.2)	0.75 (19.1)	0.24 (6.1)	0.48 (12.1)	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG					
S100X225VATY*												
S100X225VBTY*	TIA Blue											
S100X225VDTY*	TIA Green											
S100X225VGTY*	TIA Purple											
S100X225VHTY*	TIA Red											
S100X225VITY*	TIA Yellow											
S100X250VA1Y	White	2.50 (63.5)						1.00 (25.4)	0.32 (8.1)	0.48 (12.1)	6 - 2 AWG	1500
 S100X250VATY*												5000
 S100X400VA1Y		4.00 (101.6)						0.95 (24.3)	2 - 1 AWG	1000		
 S100X400VATY*			2500									
 S100X650VA1Y		6.50 (165.1)	1.50 (38.1)	0.48 (12.1)	1.59 (40.4)	1/0 - 250 MCM	250					
 S100X650VATY*							1000					
 S150X150VATY*		White	1.50 (38.1)	1.50 (38.1)	0.50 (12.7)	0.16 (4.1)	0.32 (8.1)	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	5000			
 S150X225VATY*										8 – 4 AWG		
 S150X400VATY*										2 – 1 AWG	2500	
 S200X150VATY*		White	2.00 (50.8)	1.50 (38.1)	0.50 (12.7)	0.16 (4.1)	0.32 (8.1)	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	2	5000		
 S200X225VA1Y	500											
 S200X225VATY*	0.48 (12.1)			1000								
 S200X250VATY*					6 – 2 AWG							
 S200X400VA1Y	1.00 (25.4)			0.32 (8.1)	0.95 (24.3)	2 - 1 AWG	500					
 S200X400VATY*							1000					
 S200X650VA1Y	6.50 (165.1)			1.50 (38.1)	0.48 (12.1)	1.59 (40.4)	1/0 - 250 MCM	250				
 S200X650VATY*								1000				

Order number of labels required in multiples of Standard Package Quantity.

\*Labels are roll mounted on 3.00 in. cores; when using the DP4300M printer and 3.00 in. cores, the roll stand (TDP43ME-RS) is required.

### Tedlar™ Self-Laminating Labels

- Self-extinguishing material
- Sized specifically for wire and cable applications
- Not recommended for flat format applications
- Use thermal transfer hybrid ribbons shown on pages 4 and 5
- Temperature range: -65°F to 275°F (-54°C to 135°C)
- UL969 recognized File # MH14979; cUL recognized C22.2 No. 0.15.01, File # MH14979

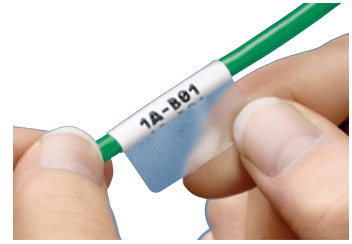

Part Number	Print-On Area Color	Width In. (mm)	Length In. (mm)	Print-On Area Height In. (mm)	Min Cable O.D. In. (mm)	Max Cable O.D. In. (mm)	Wire Range	Labels Per Row	Std. Pkg. Qty.	
<b>S050X150TAT-A</b>	White	0.50 (12.7)	1.50 (38.1)	0.50 (12.7)	0.16 (4.0)	0.32 (8.1)	Cat. 5e UTP/Cat. 6 UTP/ Cat.6A UTP/ Cat. 5e FTP/10 – 6 AWG	8	5000	
<b>S075X125TAT-A</b>		0.75 (19.1)	1.25 (31.8)	0.38 (9.7)	0.12 (3.1)	0.28 (7.0)	Cat. 3 UTP/12 – 10 AWG	5		
<b>S100X075TAT-A</b>		1.00 (25.4)		0.75 (19.1)	0.25 (6.4)	0.08 (2.0)	0.16 (4.0)	Cat. 6 28 AWG/18 – 14 AWG	4	2500
<b>S100X150TAT-A</b>				1.50 (38.1)	0.50 (12.7)	0.16 (4.0)	0.32 (8.1)	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/ 10 - 6 AWG		
<b>S100X225TAT-A</b>				2.25 (57.2)	0.75 (19.1)	0.24 (6.1)	0.48 (12.1)	Cat. 6 FTP/Cat. 6A UTP/ Cat. 6A FTP/8 – 4 AWG		
<b>S100X400TAT-A</b>										
<b>S200X400TAT-A</b>		2.00 (50.8)	4.00 (101.6)	1.00 (25.4)	0.32 (8.1)	0.95 (24.1)	2 – 1 AWG	2	500	

Tedlar® is a registered trademark of E.I. du Pont de Nemours and Company.  
 Order number of labels required in multiples of Standard Package Quantity.  
 Labels are roll mounted on 3.00 in. cores; when using the DP4300M printer and 3.00 in. cores, the roll stand (TDP43ME-RS) is required.

**LabelCore™ Fiber Optic Cable Identification System** **PATENTED**

- Provides a larger labeling surface on small fiber cables and allows legends to be clearly seen
- Sleeves are made of flexible PVC material
- Locate sleeve on straight section of cable at least 2 inches from fiber boot




Part Number	Color	Description	Std. Pkg. Qty.
<b>NWSLC-2Y</b>	Yellow	Yellow cable identification sleeve for 2mm simplex fiber cable, 1 in. long, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAM (MP300 Hand-held Printer); S100X150VA1Y or S100X150VATY (Thermal Transfer Printer).	100
<b>NWSLC-2Y-AQ</b>	Aqua	Aqua cable identification sleeve for 2mm simplex cable, 1 in. long, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAM (MP300 Hand-held Printer); S100X150VA1Y or S100X150VATY (Thermal Transfer Printer).	
<b>NWSLC-3Y</b>	Orange	Orange cable identification sleeve for 3mm simplex cable, 1 in. long, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAM (MP300 Hand-held Printer); S100X150VA1Y or S100X150VATY (Thermal Transfer Printer).	
<b>NWSLC-7Y</b>	White	White cable identification sleeve for 3mm duplex fiber cable, 1 in. long, use with labels: S100X225YAJ (Laser/Inkjet); S100X225VAM (MP300 Hand-held Printer); S100X225VATY or S200X225VATY (Thermal Transfer Printer).	
<b>NWSLC2-2Y</b>	Yellow	Yellow cable identification sleeve for 2mm simplex cable, 2 inches long, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer).	
<b>NWSLC2-2Y-AQ</b>	Aqua	Aqua cable identification sleeve for 2mm simplex cable, 2 inches long, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer).	
<b>NWSLC2-3Y</b>	Orange	Orange cable identification sleeve for 3mm simplex cable, 2 inches long, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer).	
<b>NWSLC2-3Y-AQ</b>	Aqua	Aqua cable identification sleeve for 3mm simplex cable, 2 inches long, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer)	
<b>NWSLC2-3Y-WH</b>	White	White cable identification sleeve for 3mm simplex cable, 2 inches long, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer)	
<b>NWSLC2-3Y-YL</b>	Yellow	Yellow cable identification sleeve for 3mm simplex cable, 2 inches long, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer)	
<b>NWSLC2-7Y</b>	White	White cable identification sleeve for 3mm duplex fiber cable, 2 inches long, use with labels: S200X225YAJ (Laser/Inkjet) S200X225VATY (Thermal Transfer Printer).	

Order number of labels required in multiples of Standard Package Quantity.

## Flag Labels

- Halogen-free, white polyester flag-style marker for wire/cable labeling
- Improved legibility and more information on small wires and cables provide clearer, more complete identification
- Innovative design allows the product to be applied as a permanent adhesive label or as a repositionable non-adhesive label
- Use thermal transfer resin ribbons shown on pages 4 and 5
- Temperature range: -40°F to 302°F (-40°C to 150°C )
- UL969 recognized, File # MH14576 and File # MH14979; cUL recognized C22.2 No. 0.15-01, File # MH14979

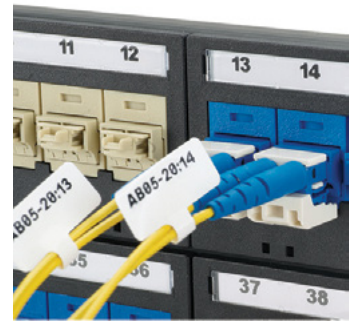

Part Number	Width In. (mm)	Height In. (mm)	Print-On Area		Min Cable O.D. In. (mm)	Max Cable O.D. In. (mm)	Wire Range	Std. Pkg. Qty. Roll
			Width In. (mm)	Height In. (mm)				
<b>F100X150AJT</b>	1.00 (25.4)	1.50 (38.1)	0.88 (22.4)	0.75 (19.1)	0.12 (3.1)	0.20 (5.1)	12 – 10 AWG	2500
<b>F100X213AJT</b>		2.13 (54.1)			0.32 (8.1)	0.38 (9.7)	3 – 2 AWG	
<b>F100X300AJT</b>		3.00 (76.2)		2.00 (50.8)	0.09 (2.3)	0.28 (7.1)	18 – 6 AWG	
<b>F100X363AJT</b>		3.63 (92.2)			0.20 (5.1)	0.46 (11.7)	8 – 1 AWG	
<b>F118X276AJT-A</b>	1.18 (29.97)	2.76 (70.0)	1.18 (29.97)	0.79 (20.0)	0.083 (2.12)	0.27 (6.86)	18 – 6 AWG	


Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00 in. cores; when using the DP4300M Printer and 3.00 in. cores, the roll stand (TDP43ME-RS) is required.



### Vinyl Cloth Labels

- Thin and conformable material with repositionable adhesive allows label to be removed and reused in temporary applications
- Works well on Teflon® coated wires\*
- Used in a wrap format or flag format for marking
- Use thermal transfer hybrid ribbons shown on pages 4 and 5
- Temperature range: -40° F to 170° F (-40° C to 77° C)
- UL969 recognized, File # MH14576 and MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14576




Part Number	Print-On Area Color	Width In. (mm)	Length In. (mm)	Min Cable O.D. In. (mm)	Max Cable O.D. In. (mm)	Wire Range	Labels Per Row	Std. Pkg. Qty.	
N025X075CBT	White	0.25 (6.4)	0.75 (19.1)	0.12 (3.1)	0.16 (4.1)	12 – 10 AWG	7	10000	
N025X150CBT			1.50 (38.1)	0.24 (6.1)	0.40 (10.2)	8 – 2 AWG		2500	
N025X175CBT			1.75 (44.5)	0.28 (7.1)	0.48 (12.2)	6 – 1 AWG			
FEATURED N050X075CBT		0.50 (12.7)	0.75 (19.1)	0.12 (3.1)	0.16 (4.1)	12 – 10 AWG		10000	
N050X100CBT			1.00 (25.4)	0.16 (4.1)	0.24 (6.1)	10 – 8 AWG			
N050X125CBT			1.25 (31.8)	0.20 (5.1)	0.32 (8.1)	10 – 6 AWG			
N050X150CBT		1.50 (38.1)	0.24 (6.1)	0.40 (10.2)	8 – 2 AWG	2500			
FEATURED N100X075CBT		1.00 (25.4)	1.00 (25.4)	0.75 (19.1)	0.12 (3.1)	0.16 (4.1)	12 – 10 AWG	3	10000
N100X125CBT				1.25 (31.8)	0.20 (5.1)	0.32 (8.1)	10 – 6 AWG		5000
N100X150CBT				1.50 (38.1)	0.24 (6.1)	0.40 (10.2)	8 – 2 AWG		
N100X175CBT				1.75 (44.5)	0.28 (7.1)	0.48 (12.2)	6 – 1 AWG		2500

Order number of labels required in multiples of Standard Package Quantity.  
 Labels are roll mounted on 3.00 in. cores; when using the DP4300M Printer and 3.00 in. cores, the roll stand (TDP43ME-RS) is required.  
 \*Teflon® is a registered trademark of E. I du Pont de Nemours and Company

### Non-Laminated Nylon Cloth Labels

- Offer crisp, clear legends with superior legibility
- Used in flat applications and in a wrap format for wire/cable marking
- Use thermal transfer resin ribbons shown on pages 4 and 5
- Temperature range: -65°F to 275°F (-54°C to 135°C)



Part Number	Color	Width In. (mm)	Length In. (mm)	Min Cable O.D. In. (mm)	Max Cable O.D. In. (mm)	Wire Range	Labels Per Row	Std. Pkg. Qty.
N050X075C1T	White	0.50 (12.7)	0.75 (19.1)	0.12 (3.1)	0.16 (4.1)	12 – 10 AWG	5	10000
N050X125C1T			1.25 (31.8)	0.20 (5.1)	0.32 (8.1)	10 – 6 AWG		
N100X075C1T		1.00 (25.4)	0.75 (19.1)	0.12 (3.1)	0.16 (4.1)	12 – 10 AWG	3	
N100X150C1T			1.50 (38.1)	0.24 (6.1)	0.40 (10.2)	8 – 2 AWG		

Order number of labels required in multiples of Standard Package Quantity.  
 Labels are roll mounted on 3.00 in. cores; when using the DP4300M Printer and 3.00 in. cores, the roll stand (TDP43ME-RS) is required.

## High-Temperature Flame-Retardant Marker Plates

- Used for identification markers in (Class 1E) harsh environments
- Compatible with Intermediate Cross Section cable ties
- Use thermal transfer RMER4BL-A or RHER4BL-A resin ribbons shown on pages 4 and 5
- Temperature range: -67°F to 275°F (-55°C to 135°C)



Part Number	Color	Width In. (mm)	Height In. (mm)	Print-On Area Width In. (mm)	Labels Per Roll	Std. Pkg. Qty. (Roll)
M200X042FQT	White	2.00 (50.8)	0.42 (10.7)	1.22 (31.0)	500	1
M200X042FQT-B					2000	
M200X080FQT			0.80 (20.3)		250	
M200X080FQT-B					1000	

Order number of labels required in multiples of Standard Package Quantity.  
Labels are roll mounted on 3.00 in. cores; when using the DP4300M printer and 3.00 in. cores, the roll stand (TDP43ME-RS) is required.

## Halogen-Free Flame-Retardant Marker Plates

- Used to identify wires, cables, equipment, and many other applications
- Offer crisp, clear legend with superior legibility and engineered to withstand high temperatures, harsh solvents, oils, and chemicals without over-lamination
- Compatible with Intermediate Cross Section cable ties
- Use thermal transfer resin ribbons shown on pages 4 and 5
- Temperature range: -40°F to 193°F (-40°C to 90°C)




Part Number	Color	Width In. (mm)	Height In. (mm)	Print-On Area Width In. (mm)	Labels Per Roll	Std. Pkg. Qty. (Roll)
M200X042UPT	White	2.00 (50.8)	0.42 (10.7)	1.30 (33.0)	500	1
M200X042UPT-B					2000	
M200X080UPT			0.80 (20.3)		500	
M200X080UPT-B					2000	

FEATURED

Order number of labels required in multiples of Standard Package Quantity.  
Labels are roll mounted on 3.00 in. cores; when using the DP4300M printer and 3.00 in. cores, the roll stand (TDP43ME-RS) is required.

### Standard Marker Plates

- Non-adhesive and halogen free; used to identify wires, cables, equipment, and many other applications
- Attachable in horizontal or vertical orientation. The 0.5 in. Plenum rated and 0.33 in. non-Plenum rated Hook & Loop Cable Ties can be used in hanging position
- Meets the outgassing requirements of ASTM E-595 suitable for use in air handling spaces
- Available in a variety of colors and sizes
- Use thermal transfer resin ribbons shown on pages 4 and 5
- Temperature range: -58°F to 221°F (-50°C to 105°C)

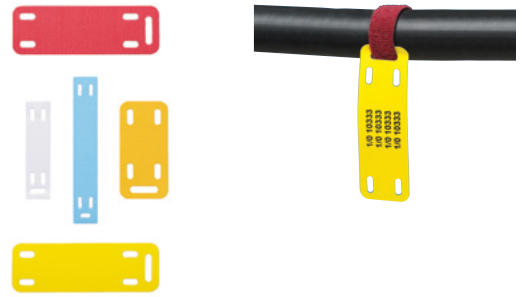

Part Number	Color	Width In. (mm)	Height In. (mm)	Print-On Area Width In. (mm)	Cable Type	Labels Per Roll	Std. Pkg. Qty. (Roll)
M200X050Y6T	TIA Yellow	2.00 (50.8)	0.50 (12.7)	1.07 (27.3)	Intermediate Cross Section Cable Ties	500	1
M200X050Y7T	White						
M200X050ACT	TIA Blue	2.00 (50.8)	1.00 (25.4)	0.80 (20.3)	Standard Cross Section Cable Ties	2000	
M200X100Y6T	TIA Yellow						
M200X100Y7T	White	2.00 (50.8)	1.00 (25.4)	0.80 (20.3)	Standard Cross Section Cable Ties	2000	
M200X100Y7T-B	White						
M200X100ACT	TIA Blue	2.00 (50.8)	1.00 (25.4)	0.80 (20.3)	Standard Cross Section Cable Ties	2000	
M200X100ACT	TIA Blue						
<b>FEATURED</b> M300X050Y6T	TIA Yellow	3.00 (76.2)	0.50 (12.7)	2.07 (52.6)	Intermediate Cross Section Cable Ties	500	
M300X050Y7T	White						
M300X050ACT	TIA Blue	3.00 (76.2)	0.50 (12.7)	2.07 (52.6)	Intermediate Cross Section Cable Ties	500	
M300X050AIT	TIA Red						
<b>FEATURED</b> M300X100Y6T	TIA Yellow	3.00 (76.2)	1.00 (25.4)	1.80 (45.7)	Standard Cross Section Cable Ties	500	
<b>FEATURED</b> M300X100Y7T	White						
M300X100ACT	TIA Blue	3.00 (76.2)	1.00 (25.4)	1.80 (45.7)	Standard Cross Section Cable Ties	500	
M300X100AGT	TIA Orange						
M300X100AIT	TIA Red	3.00 (76.2)	1.00 (25.4)	1.80 (45.7)	Standard Cross Section Cable Ties	500	
M300X100AIT	TIA Red						

Order number of labels required in multiples of Standard Package Quantity.  
 Labels are roll mounted on 3.00 in. cores; when using the DP4300M printer and 3.00 in. cores, the roll stand (TDP43ME-RS) is required.

### Military Grade Single-Sided Heat Shrink Labels

- Permanent, one-piece, heat shrink sleeve designed to provide clear, durable identification of wires and cables
- Meet UL Standard 224 with a VW-1 rating for flammability and AMS-DTL-23053/5C (Class 1 and Class 3)
- Meet SAE-AS81531, MIL-STD-883F Method 2015.13, Solutions A, B, and D, and MIL-STD-202G Method 215K, Solutions A, C, and D when printed with resin and hybrid thermal transfer ribbons
- Shrink ratio 3:1

- Tested for use as an identification marker in (Class 1E) harsh environments
- Use thermal transfer hybrid ribbon or white resin ribbons shown on pages 4 and 5
- Temperature range: -67°F to 275°F (-55°C to 135°C)
- UL224 recognized, File # E205133; CSA certified, C22.2 No. 198.1.06, File # 256205



Part Number	Color	Diameter In. (mm)	Width In. (mm)	Height In. (mm)	Min Cable O.D. In. (mm)	Max Cable O.D. In. (mm)	Wire Range	Labels Per Row	Labels Per Roll	Std. Pkg. Qty. (Roll)
<b>FEATURED</b> H050X025H1T*	White	0.13 (3.3)	0.50 (12.7)	0.25 (6.4)	0.04 (1.0)	0.13 (3.3)	22 – 18 AWG	4	2000	1
H050X025H2T	Yellow									
<b>FEATURED</b> H075X025H1T*	White		0.75 (19.1)							
<b>BEST SELLER</b> H100X025H1T*	White									
H100X025H2T	Yellow		1.00 (25.4)							
H150X025H1T*	White									
H150X025H2T	Yellow		2.00 (50.8)							
<b>FEATURED</b> H200X025H1T*	White									
H200X025H2T	Yellow									
H200X025H3T	Black									
H200X025H4T	Red									
<b>FEATURED</b> H050X034H1T*	White		0.19 (4.8)					0.50 (12.7)	0.34 (8.6)	
H050X034H2T	Yellow									
H075X034H1T*	White	0.75 (19.1)								
<b>BEST SELLER</b> H100X034H1T*	White									
H100X034H2T	Yellow	1.00 (25.4)								
<b>FEATURED</b> H150X034H1T*	White									
H150X034H2T	Yellow	2.00 (50.8)								
<b>BEST SELLER</b> H200X034H1T*	White									
H200X034H2T	Yellow									
H200X034H3T	Black									
H200X034H4T	Red									
<b>FEATURED</b> H050X044H1T*	White	0.25 (6.4)		0.50 (12.7)	0.44 (11.2)	0.08 (2.0)	0.25 (6.4)	16 – 10 AWG		4
H050X044H2T	Yellow									
<b>FEATURED</b> H075X044H1T*	White		0.75 (19.1)							
<b>BEST SELLER</b> H100X044H1T*	White									
H100X044H2T	Yellow		1.00 (25.4)							
<b>FEATURED</b> H150X044H1T*	White									
H150X044H2T	Yellow		2.00 (50.8)							
<b>BEST SELLER</b> H200X044H1T*	White									
H200X044H2T	Yellow									
H200X044H3T	Black									
H200X044H4T	Red									

Order number of labels required in multiples of Standard Package Quantity. For different ribbon colors, see pages 4 and 5.  
 \*Available in Bulk packages (5 times Labels Per Roll), add -B to end of part number. Additional Part numbers are available on page 17.



**Military Grade Single-Sided Heat Shrink Labels (continued)**

Part Number	Color	Diameter In. (mm)	Width In. (mm)	Height In. (mm)	Min Cable O.D. In. (mm)	Max Cable O.D. In. (mm)	Wire Range	Labels Per Row	Labels Per Roll	Std. Pkg. Qty. (Roll)						
H050X064H1T*	White	0.38 (9.7)	0.50 (12.7)	0.64 (16.3)	0.13 (3.3)	0.38 (9.7)	12 – 6 AWG	4	2000	1						
H050X064H2T	Yellow															
<b>FEATURED</b> H100X064H1T*	White		1.00 (25.4)					2	1000							
H100X064H2T	Yellow															
<b>BEST SELLER</b> H200X064H1T*	White		2.00 (50.8)					1	500							
H200X064H2T	Yellow															
H200X064H3T	Black															
H200X064H4T	Red															
H050X084H1T	White	0.50 (12.7)	0.50 (12.7)	0.84 (21.3)	0.17 (4.3)	0.50 (12.7)	8 – 1 AWG	4	2000	1						
<b>FEATURED</b> H100X084H1T	White										1.00 (25.4)	2	1000			
H100X084H2T	Yellow															
<b>FEATURED</b> H200X084H1T	White		2.00 (50.8)					1	500							
H200X084H2T	Yellow															
H200X084H3T	Black															
H200X084H4T	Red															
<b>FEATURED</b> H100X165H1T	White		1.00 (25.4)					1.00 (25.4)	1.65 (41.9)		0.33 (8.4)	1.00 (25.4)	4 AWG – 500 MCM	2	500	1
H100X165H2T	Yellow															
<b>FEATURED</b> H200X165H1T	White	2.00 (50.8)		1	250											
H200X165H2T	Yellow															
H200X165H3T	Black															
H200X165H4T	Red															
<b>FEATURED</b> H200X240H1T	White	1.50 (38.1)		2.00 (50.8)	2.40 (61.0)	0.50 (12.7)	1.50 (38.1)	1 AWG – 1000 MCM		1				100	1	
H200X240H2T	Yellow															

Order number of labels required in multiples of Standard Package Quantity. For different ribbon colors, see pages 4 and 5.

\*Available in Bulk packages (5 times Labels Per Roll), add -B to end of part number.

## Military Grade Two-Sided Heat Shrink Labels

**PATENTED**



- Permanent, one-piece, heat shrink sleeve designed to provide clear, durable identification of wires and cables
- Can be printed on both sides for improved visibility
- Meet the material requirements and physical properties of AMS-DTL-23053/5C (Class 1 and Class 3) and UL standard 224 with a VW-1 rating
- Meet SAE-AS81531, MIL-STD-883F Method 2015.13, Solutions A, B and D, and MIL-STD-202G Method 215K, Solutions A,C and D when printed using resin or hybrid thermal transfer ribbons
- Shrink ratio 3:1
- Tested as an identification marker for use in (Class 1E) harsh environments
- Use thermal transfer hybrid ribbons shown on pages 4 and 5
- Temperature range: -67°F to 275°F (-55°C to 135°C)
- UL224 recognized, File # E205133; CSA certified, C22.2 No. 198.1-06, File # 256205



Part Number	Color	Diameter In. (mm)	Width In. (mm)	Height In. (mm)	Min Cable O.D. In. (mm)	Max Cable O.D. In. (mm)	Wire Range	Labels Per Row	Labels Per Roll	Std. Pkg. Qty. (Roll)
H100X025H1T-2	White	0.13 (3.1)	1.00 (25.4)	0.25 (6.4)	0.04 (1.0)	0.13 (3.3)	22 – 18 AWG	2	1000	1
H100X025H1T-2-B									5000	
H100X025H2T-2	Yellow		1000							
H200X025H1T-2	White		2.00 (50.8)					1	500	
H200X025H1T-2-B									2500	
H200X025H2T-2	Yellow		500							
H100X034H1T-2	White	0.19 (4.7)	1.00 (25.4)	0.34 (8.6)	0.06 (1.5)	0.19 (4.8)	18 – 12 AWG	2	1000	
H100X034H1T-2-B									5000	
H100X034H2T-2	Yellow		1000							
H200X034H1T-2	White		2.00 (50.8)					1	500	
H200X034H1T-2-B									2500	
H200X034H2T-2	Yellow		500							
H100X044H1T-2	White	0.25 (6.3)	1.00 (25.4)	0.44 (11.2)	0.08 (2.0)	0.25 (6.4)	16 – 10 AWG	2	1000	
H100X044H1T-2-B									5000	
H100X044H2T-2	Yellow		1000							
H200X044H1T-2	White		2.00 (50.8)					1	500	
H200X044H1T-2-B									2500	
H200X044H2T-2	Yellow		500							
H100X064H1T-2	White	0.38 (9.7)	1.00 (25.4)	0.64 (16.3)	0.13 (3.3)	0.38 (9.7)	12 – 6 AWG	2	1000	
H100X064H1T-2-B									5000	
H100X064H2T-2	Yellow		1000							
H200X064H1T-2	White		2.00 (50.8)					1	500	
H200X064H1T-2-B									2500	
H200X064H2T-2	Yellow		500							

Order number of labels required in multiples of Standard Package Quantity. Additional part numbers available on page 19.

**Military Grade Two-Sided Heat Shrink Labels (continued)** 

Part Number	Color	Diameter In. (mm)	Width In. (mm)	Height In. (mm)	Min Cable O.D. In. (mm)	Max Cable O.D. In. (mm)	Wire Range	Labels Per Row	Labels Per Roll	Std. Pkg. Qty. (Roll)
H100X084H1T-2	White	0.50 (12.7)	1.00 (25.4)	0.84 (21.3)	0.17 (4.3)	0.50 (12.7)	8 – 1 AWG	2	1000	1
 H100X084H1T-2-B	5000									
H100X084H2T-2	Yellow		1000							
 H200X084H1T-2	White		500							
H200X084H1T-2-B	White	2.00 (50.8)	1	2500						
H200X084H2T-2	Yellow	500								
H100X122H1T-2	White	0.75 (19.0)	1.00 (25.4)	1.22 (31.0)	0.25 (6.3)	0.75 (19.0)	8 – 4/0 AWG	2	500	
H100X122H2T-2	Yellow		250							
H200X122H1T-2	White		2.00 (50.8)					1	250	
H200X122H2T-2	Yellow									
H100X165H1T-2	White	1.00 (25.4)	1.00 (25.4)	1.65 (41.9)	0.33 (8.4)	1.00 (25.4)	4 AWG – 500 MCM	2	500	
H100X165H2T-2	Yellow									
H200X165H1T-2	White		2.00 (25.4)					1	250	
H200X165H2T-2	Yellow									

Order number of labels required in multiples of Standard Package Quantity.

## Halogen-Free Two-Sided Heat Shrink Labels PATENTED

- Permanent, one-piece, heat shrink sleeve designed to provide clear, durable identification of wires and cables
- Can be printed on both sides for improved visibility
- Meet SAE-AS5942, MIL-STD-883F Method 2015.13, Solutions A, B, and D, and MIL-STD-202G Method 215K, Solutions A, C, and D when printed with resin and hybrid thermal transfer ribbons
- Meet BS6853; 1999 Vehicle Category 1A for burning behavior and toxic gas emissions
- Shrink ratio 2:1
- Use thermal transfer hybrid ribbons shown on pages 4 and 5
- Temperature range: -22°F to 221°F (-30°C to 105°C)




Part Number	Color	Diameter In. (mm)	Width In. (mm)	Height In. (mm)	Min Cable O.D. In. (mm)	Max Cable O.D. In. (mm)	Wire Range	Labels Per Row	Labels Per Roll	Std. Pkg. Qty. (Roll)
H100X025HGT-2	Yellow	0.13 (3.3)	1.00 (25.4)	0.25 (6.4)	0.06 (1.5)	0.13 (3.3)	22 – 18 AWG	2	1000	1
			2.00 (50.8)					1	500	
H200X025HFT-2	White		1.00 (25.4)					2	1000	
			2.00 (50.8)					1	500	
H100X034HGT-2	Yellow	0.19 (4.8)	1.00 (25.4)	0.34 (8.6)	0.09 (2.3)	0.19 (4.8)	18 – 12 AWG	2	1000	
			2.00 (50.8)					1	500	
H200X034HFT-2	White		1.00 (25.4)					2	1000	
			2.00 (50.8)					1	500	
H100X044HGT-2	Yellow	0.25 (6.4)	1.00 (25.4)	0.44 (11.1)	0.13 (3.3)	0.25 (6.4)	16 – 10 AWG	2	1000	
			2.00 (50.8)					1	500	
H200X044HFT-2	White		1.00 (25.4)					2	1000	
			2.00 (50.8)					1	500	
H100X064HGT-2	Yellow	0.38 (9.7)	1.00 (25.4)	0.64 (16.2)	0.19 (4.8)	0.38 (9.7)	12 – 6 AWG	2	1000	
			2.00 (50.8)					1	500	
H200X064HFT-2	White		1.00 (25.4)					2	1000	
			2.00 (50.8)					1	500	
H100X084HGT-2	Yellow	0.50 (12.7)	1.00 (25.4)	0.84 (21.3)	0.25 (6.4)	0.50 (12.7)	8 – 1 AWG	2	1000	
			2.00 (50.8)					1	500	
H200X084HFT-2	White		1.00 (25.4)					2	1000	
			2.00 (50.8)					1	500	
H100X165HGT-2	Yellow	1.00 (25.4)	1.00 (25.4)	1.65 (41.9)	0.50 (12.7)	1.00 (25.4)	8 AWG – 500 MCM	2	250	
			2.00 (50.8)					1	250	
H200X165HFT-2	White		1.00 (25.4)					2	500	
			2.00 (50.8)					1	250	

Order number of labels required in multiples of Standard Package Quantity



### Raised Panel Push Button Labels

- Deliver the look of engraved laminated plates with the convenience of printing on demand
- Strong holding power for rough, textured, and powder coated surfaces
- Provide crisp, clear, and durable legends for your reliable, high-performance identification needs
- Meet ASTM G154 for outdoor durability (simulating 20 years of UV resistance under normal conditions but not all outdoor exposure)
- Meets DIN 40050-9, IP69K for washdown applications
- Meet ASTM D3389 standard for abrasion resistance and also meet solar application standards
- Use thermal transfer resin ribbons shown on pages 4 and 5
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979




Part Number	Color	Width In. (mm)	Height In. (mm)	Print-On Area Height In. (mm)	Hole Diameter In. (mm)	Labels Per Row	Std. Pkg. Qty.
C120X150APT-22	White	1.20 (30.5)	1.50 (38.1)	0.45 (11.4)	0.87 (22.0)	3	500
C120X150A8T-22	Yellow						
C120X150AST-22	Green						
C120X150AWT-22	Red						
C120X150A0T-22	Black						
C120X190APT-22	White	1.80 (45.7)	1.90 (48.3)	0.85 (21.6)	1.18 (30.0)	2	
C120X190A8T-22	Yellow						
C120X190AST-22	Green						
C120X190AWT-22	Red						
C120X190A0T-22	Black						
C180X180APT-30	White	2.40 (61.0)	2.40 (61.0)	0.90 (22.9)	1.18 (30.0)	1	
C180X180A8T-30	Yellow						
C180X180AST-30	Green						
C180X180AWT-30	Red						
C180X180A0T-30	Black						
C240X240APT-30	White						
C240X240A8T-30	Yellow						
C240X240AST-30	Green						
C240X240AWT-30	Red						
C240X240A0T-30	Black						

Order number of labels required in multiples of Standard Package Quantity.  
 Labels are roll mounted on 3.00 in. cores; when using the DP4300M printer and 3.00 in. cores, the roll stand (TDP43ME-RS) is required.

### Raised Panel Half Push Button Labels

- Deliver the look of engraved laminated plates with the convenience of printing on demand
- Strong holding power for rough, textured, and powder-coated surfaces
- Provide crisp, clear, and durable legends for your reliable, high-performance identification needs
- Meets DIN 40050-9, IP69K for washdown applications
- Use thermal transfer resin ribbons shown on pages 4 and 5
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979

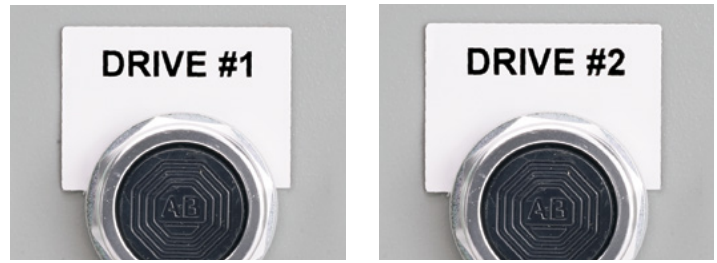

Part Number	Color	Width In. (mm)	Height In. (mm)	Print-On Area Height In. (mm)	Hole Diameter In. (mm)	Labels Per Row	Std. Pkg. Qty.
C180X130APT-30H	White	1.80 (45.7)	1.30 (33.0)	0.73 (18.5)	1.18 (30.0)	1	500
C240X200APT-30H		2.40 (61.0)	2.00 (50.8)	1.43 (36.3)			

Order number of labels required in multiples of Standard Package Quantity.  
 Labels are roll mounted on 3.00 in. cores; when using the DP4300M printer and 3.00 in. cores, the roll stand (TDP43ME-RS) is required.

### Raised Panel Pre-Printed Emergency Stop Labels

- Deliver the look of engraved plates
- Strong holding power for rough, textured, and powder-coated surfaces
- Meets DIN 40050-9, IP69K for washdown applications
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14576; cUL recognized C22.2 No. 0.15.01, File # MH14576



Part Number	Color	Diameter In. (mm)	Hole Diameter In. (mm)	Std. Pkg. Qty.
C235A8-30-ES	Black on Yellow	2.35 (60.0)	1.18 (30.0)	25
C350A8-30-ES		3.50 (89.0)		

Order number of labels required in multiples of Standard Package Quantity.

### Raised Panel Component Labels

- Deliver the look of engraved laminated plates with the convenience of printing on demand
- Strong holding power for rough, textured, and powder-coated surfaces
- Provide crisp, clear, and durable legends for your reliable, high-performance identification needs
- Meet ASTM G154 for outdoor durability (simulating 20 years of UV resistance under normal conditions but not all outdoor exposure)
- Meets DIN 40050-9, IP69K for washdown applications
- Meet ASTM D3389 standard for abrasion resistance, and also meet solar application standards
- Use thermal transfer resin ribbons shown on pages 4 and 5
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



Part Number	Color	Width In. (mm)	Height In. (mm)	Labels Per Row	Std. Pkg. Qty.	
<b>FEATURED</b> C100X050APT	White	1.00 (25.4)	0.50 (12.7)	3	500	
C100X050A8T	Yellow					
C100X050AST	Green					
C100X050AWT	Red					
C100X050AOT	Black					
C100X050AMT	Silver					
C125X030APT	White	1.25 (31.8)	0.30 (7.6)	3		
C170X090APT		1.70 (43.2)	0.90 (22.9)			
C200X100APT	White	2.00 (50.8)	1.00 (25.4)	3		
C200X100A8T						Yellow
C200X100AST						Green
C200X100AWT						Red
C200X100AOT						Black
C200X100AMT						Silver
C252X030APT	White	2.52 (64.0)	0.30 (7.6)	3		
<b>FEATURED</b> C300X100APT	White	3.00 (76.2)	1.00 (25.4)			1
C300X100A8T				Yellow		
C300X100AWT				Red		
C300X250APT				White		
C300X250A8T				Yellow		
C300X250AWT				Red		
C300X250AOT	Black					
C300X250AMT	Silver					
C350X300APT	White	3.50 (88.9)	3.00 (76.2)	3		
C350X300A8T	Yellow					
C350X300AOT	Black					
C379X030APT	White	3.79 (96.3)	0.30 (7.6)	3		
C379X030AQT	Blue					
C379X030AWT	Red					
<b>FEATURED</b> C400X100APT	White	4.00 (101.6)	1.00 (25.4)	3		
C400X100A8T	Yellow					
C400X100AST	Green					
C400X100AWT	Red					
C400X100AOT	Black					
C400X100AMT	Silver					

Order number of labels required in multiples of Standard Package Quantity. Labels are roll mounted on 3.00 in. cores; when using the DP4300M printer and 3.00 in. cores, the roll stand (TDP43ME-RS) is required.

### Polyester Component Labels

- Provide durability; high-temperature resistance and dimensional stability; does not easily stretch or tear
- Use thermal transfer resin ribbons shown on pages 4 and 5
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14576 and File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979




Part Number	Color	Width In. (mm)	Height In. (mm)	Labels Per Row	Std. Pkg. Qty.				
C025X025YJT	White	0.25 (6.4)	0.25 (6.4)	12	10000				
C038X038YJT		0.38 (9.7)	0.38 (9.7)	7					
C050X044YJT		0.50 (12.7)	0.44 (11.2)	5					
C060X020YJT		0.60 (15.2)	0.20 (5.1)	3					
C075X025YJT		0.75 (19.1)	0.25 (6.4)						
C080X020YJT		0.80 (20.3)	0.20 (5.1)						
C090X025YJT		0.90 (22.9)	0.25 (6.4)	3					
C100X025YJT		1.00 (25.4)	0.38 (9.7)						
C100X038YJT			0.50 (12.7)						
C100X050YJT		Silver	1.00 (25.4)	0.50 (12.7)		5000			
C125X038YJT	White	1.25 (31.8)	0.38 (9.7)						
C150X050YJT		1.50 (38.1)	0.50 (12.7)						
C150X075YJT		1.50 (38.1)	0.75 (19.1)						
C200X025YJT		2.00 (50.8)	0.25 (6.4)						
C200X038YJT		2.00 (50.8)	0.38 (9.7)						
C200X050YJT		2.00 (50.8)	0.50 (12.7)						
C200X100YJT		2.00 (50.8)	1.00 (25.4)						
C200X100YMT		Silver	2.00 (50.8)	1.00 (25.4)					
C275X125YJT		White	2.75 (69.9)	1.25 (31.8)					
C275X125YMT		Silver	2.75 (69.9)	1.25 (31.8)					
C300X038YJT	White	3.00 (76.2)	0.38 (9.7)	1	500				
C300X100YJT			1.00 (25.4)		2500				
C300X100YMT			Silver		1.00 (25.4)	2500			
C300X200YJT			White		2.00 (50.8)	1000			
C300X200YMT			Silver		2.00 (50.8)	1000			
C350X100YJT			White		4.00 (101.6)	3.50 (88.9)	1	2500	
C400X100YJT						1.00 (25.4)		2500	
C400X200YJT						2.00 (50.8)		1000	
C400X200YMT						Silver		2.00 (50.8)	1000
C400X300YJT						3.00 (76.2)		2500	
C400X400YJT	4.00 (101.6)	2500							
C400X600YJT	6.00 (152.4)	1000							

Order number of labels required in multiples of Standard Package Quantity.  
 Labels are roll mounted on 3.00 in. cores; when using the DP4300M printer and 3.00 in. cores, the roll stand (TDP43ME-RS) is required.

### Super-Tack Polyester Component Labels

- Provide durability; high-temperature resistance and dimensional stability; does not stretch or easily tear; and has high-tack permanent adhesive
- Used to identify patch panels, faceplates, punchdown blocks, and other network systems hardware
- Meets DIN 40050-9, IP69K for washdown applications
- Use thermal transfer resin ribbons on pages 4 and 5
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



Part Number	Color	Width In. (mm)	Height In. (mm)	Type of Application	Labels Per Row	Std. Pkg. Qty.
C061X030YPT	White	0.61 (15.5)	0.30 (7.6)	1-port	4	2500
C100X050YPT		1.00 (25.4)	0.50 (12.7)	general identifier	3	10000
C125X030YPT		1.25 (31.8)	0.30 (7.6)	2-port	2500	
C188X030YPT		1.88 (47.8)	0.30 (7.6)	3-port		
C200X100YPT		2.00 (50.8)	1.00 (25.4)	general identifier		
C252X030YPT		2.52 (64.0)	0.30 (7.6)	4-port		
C252X030YPT-P*		2.52 (64.0)		1, 2, 3, or 4-port		
C261X030YPT		2.61 (66.3)	0.30 (7.6)	4-port		
C379X030YPT		3.79 (96.3)	0.30 (7.6)	6-port		
C379X030YPT-P*		3.79 (96.3)		1, 2, 3, 4, 5 or 6-port		
C400X300YPT		4.0 (101.6)	3.00 (76.2)	general identifier		

FEATURED

\*Label is perforated to be used in 1, 2, 3, 4, or 6-Port position applications. Order number of labels required in multiples of Standard Package Quantity. Labels are roll mounted on 3.00 in. cores; when using the DP4300M printer and 3.00 in. cores, the roll stand (TDP43ME-RS) is required.

### Tedlar® Component Labels

- Self-extinguishing and ideal for labeling high-temperature areas
- Meet Federal Motor Vehicle Safety Standard (FMVSS-302) for flammability
- Use thermal transfer resin ribbons shown on pages 4 and 5
- Temperature range: -40°F to 225°F (-40°C to 106°C); tests at 275°F have shown acceptable results



Part Number	Color	Width In. (mm)	Height In. (mm)	Labels Per Row	Std. Pkg. Qty.
C090X025TJT	White	0.90 (22.9)	0.25 (6.4)	3	10000
C200X038TJT		2.00 (50.8)	0.38 (9.7)	1	5000
C200X100TJT		2.00 (50.8)	1.00 (25.4)		2500
C300X038TJT		3.00 (76.2)	0.38 (9.7)		5000

Tedlar® is a registered trademark of E.I. du Pont de Nemours and Company. Order number of labels required in multiples of Standard Package Quantity. Labels are roll mounted on 3.00 in. cores; when using the DP4300M printer and 3.00 in. cores, the roll stand (TDP43ME-RS) is required.

### Non-Adhesive Polyester Component Labels

- Used to identify patch panels, faceplates, punchdown blocks, and other network systems hardware
- Use thermal transfer resin ribbons shown on pages 4 and 5
- Temperature range: -10°F to 302°F (-23°C to 150°C)



Part Number	Color	Width In. (mm)	Height In. (mm)	Application	Labels Per Row	Std. Pkg. Qty.
C195X040Y1T	White	1.95 (49.5)	0.40 (10.2)	Single-gang faceplate	2	1000
C261X035Y1T		2.61 (66.3)	0.35 (8.9)	4-port identifier		

Order number of labels required in multiples of Standard Package Quantity. Labels are roll mounted on 3.00 in. cores; when using the DP4300M printer and 3.00 in. cores, the roll stand (TDP43ME-RS) is required.

### Vinyl Cloth Component Labels

- Ideal for temporary marking of chips, boards, and ICs
- Removable without leaving any residue
- Pliable material is suitable for rough texture surfaces
- Use thermal transfer hybrid ribbons shown on pages 4 and 5
- Temperature range: 50°F to 170°F (10°C to 77°C)
- UL969 recognized, File # MH14576 and File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14576



Part Number	Color	Width In. (mm)	Height In. (mm)	Labels Per Row	Std. Pkg. Qty.
C050X044CBT	White	0.50 (12.7)	0.44 (11.2)	5	10000
C060X020CBT		0.60 (15.2)	0.20 (5.1)	3	
C075X025CBT		0.75 (19.1)	0.25 (6.4)		
C100X038CBT		1.00 (25.4)	0.38 (9.7)	1	5000
C100X050CBT		1.50 (38.1)	0.75 (19.1)		10000
C150X075CBT		1.60 (40.6)	0.20 (5.1)	5000	
C160X020CBT		2.00 (50.8)	0.50 (12.7)		
C200X050CBT					

Order number of labels required in multiples of Standard Package Quantity. Labels are roll mounted on 3.00 in. cores; when using the DP4300M printer and 3.00 in. cores, the roll stand (TDP43ME-RS) is required.



## Polyimide Component Labels

- Ideal for electronic components and internal circuitry applications
- Intended for applications requiring solvent and high-temperature resistance performance, such as the wave solder process
- Use thermal transfer RMER4BL-C or RHER4BL-C resin ribbons on white polyimide shown on pages 4 and 5
- Use thermal transfer hybrid ribbons on tan polyimide labels shown on pages 4 and 5
- Temperature range: -40°F to 350°F (-40°C to 177°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



Part Number	Color	Width In. (mm)	Height In. (mm)	Labels Per Row	Std. Pkg. Qty.
C025X025KBT	White	0.25 (6.4)	0.25 (6.4)	12	10000
C050X020KBT		0.50 (12.7)	0.20 (5.1)	5	
C050X044KBT		0.44 (11.2)	0.44 (11.2)	5	
C100X025KBT		1.00 (25.4)	0.25 (6.4)	3	
C100X038KBT		0.38 (9.7)	0.25 (6.4)	2	5000
C150X025KBT		1.50 (38.1)	0.20 (5.1)	1	
C160X020KBT		1.60 (40.6)	0.25 (6.4)	1	
C200X025KBT		2.00 (50.8)	0.25 (6.4)	1	

Order number of labels required in multiples of Standard Package Quantity.  
Labels are roll mounted on 3.00 in. cores; when using the DP4300M printer and 3.00 in. cores, the roll stand (TDP43ME-RS) is required.

## Reflective Continuous Tapes

- Used for illuminating or highlighting a range of objects
- Offer crisp, clear legends with superior legibility
- Conformable material for flat applications and safety and facility identification
- Can be over-laminated to increase durability (see page 4)
- Use thermal transfer resin ribbons shown on pages 4 and 5
- Temperature range: -40°F to 180°F (-40°C to 82°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



Part Number	Color	Width In. (mm)	Length Ft. (m)	Std. Pkg. Qty. (Roll)
T100X000RUT	Orange	1.00 (25.4)	50.0 (15.2)	1
T400X000RPT	White	4.00 (101.6)		
T400X000RQT	Blue			
T400X000RUT	Orange			
T400X000RXT	Yellow			

Order number of labels required in multiples of Standard Package Quantity.  
Labels are roll mounted on 3.00 in. cores; when using the DP4300M printer and 3.00 in. cores, the roll stand (TDP43ME-RS) is required.

### Super-Tack Polyester Continuous Tapes

- Thermal transfer printable continuous tape format
- Super-tack polyester has ultra-aggressive adhesive
- Ideal for rough, textured, and coated surfaces
- Applications include rack unit labeling, cabinets, cable tray, pathways, control panels, enclosures, pipes, and much more
- Meets DIN 40050-9, IP69K for washdown applications
- Use thermal transfer resin ribbons shown on pages 4 and 5
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14979, cUL recognized, C22.2 No. 0.15.01, File # MH14979



Part Number	Color	Material	Width In. (mm)	Length Ft. (m)	Std. Pkg. Qty. (Roll)
T038X000YP1	White	Polyester	0.38 (9.7)	100.0 (30.5)	1
T050X000YP1			0.50 (12.7)		
T100X000Y81	Yellow				
T100X000YP1	White				
T100X000YW1	Red				
T200X000Y01	Black				
T200X000Y81	Yellow				
T200X000YP1	White				
T200X000YQ1	Blue				
T200X000YS1	Green				
T200X000YU1	Orange				
T200X000YW1	Red				
T400X000Y01	Black				
T400X000Y81	Yellow				
T400X000YP1	White				
T400X000YQ1	Blue				
T400X000YS1	Green				
T400X000YU1	Orange				
T400X000YW1	Red				

FEATURED

Order number of labels required in multiples of Standard Package Quantity.

### Continuous Tapes

- Offer crisp, clear legends with superior legibility
- Conformable material for flat applications and safety and facility identification
- Can be over-laminated to increase durability (see below)
- Use thermal transfer resin ribbons shown on pages 4 and 5
- For white, black, clear, blue, and yellow vinyl continuous tapes only: UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



Part Number	Color	Material	Temperature Range	Width In. (mm)	Length Ft. (m)	Std. Pkg. Qty. (Roll)
T024X000FJT*	White	Polyolefin	-40°F to 180°F (-40°C to 82°C)	0.24 (6.1)	100.0 (30.5)	1
T031X000FJT*				0.31 (7.9)		
T038X000FJT*				0.38 (9.7)		
T050X000FJT*				0.50 (12.7)		
T100X000VP1Y	Blue	Vinyl	-58°F to 176°F (-50°C to 80°C)	1.00 (25.4)		
T100X000VQ1Y						
T100X000VS1Y						
T100X000VU1Y						
T100X000VW1Y						
T100X000VX1Y						
T100X000VY1Y	Black	Vinyl	-58°F to 176°F (-50°C to 80°C)	2.00 (50.8)		
T100X000YK1	Clear					
T200X000VP1Y	White					
T200X000VQ1Y	Blue					
T200X000VR1Y	Brown					
T200X000VS1Y	Green					
T200X000VT1Y	Gray					
T200X000VU1Y	Orange					
T200X000VV1Y	Purple					
T200X000VW1Y	Red					
T200X000VX1Y	Yellow	Vinyl	-58°F to 176°F (-50°C to 80°C)	4.00 (101.6)		
T200X000VY1Y	Black					
T200X000YK1	Clear					
T400X000VP1Y	White					
T400X000VQ1Y	Blue					
T400X000VS1Y	Green					
T400X000VT1Y	Gray					
T400X000VU1Y	Orange					
T400X000VV1Y	Purple	Polyester	-40°F to 302°F (-40°C to 150°C)			
T400X000VW1Y	Red					
T400X000VX1Y	Yellow					
T400X000VY1Y	Black					
T400X000YK1	Clear					

Order number of rolls required in multiples of Standard Package Quantity.  
 \*Labels are roll mounted on 3.00 in. cores; when using the DP4300M printer and 3.00 in. cores, the roll stand (TDP43ME-RS) is required.

### Non-Printable Clear Over-Laminate Continuous Tapes

- Over-laminates can be used for additional protection over the 2 in. and 4 in. continuous tapes
- When over-laminates are used with Super-Tack Polyester Labels, the labels meet DIN 40050-9, IP69K for washdown applications
- Temperature range: -40°F to 302°F (-40°C to 150°C)

Part Number	Color	Material	Width In. (mm)	Length Ft. (m)	Std. Pkg. Qty.
T425X000YK1	Clear	Polyester	4.25 (107.9)	100.0 (30.5)	1

Order number of labels required in multiples of Standard Package Quantity.

### Super-Tack Polyester Arc Flash Labels

- Provide employees with the highest degree of safety through proper identification and communication
- Detailed formats compliant with NFPA 70E standard for Arc Flash labeling
- Clearly visible and recognizable hazard information to communicate arc flash hazards present
- Meets DIN 40050-9, IP69K for washdown applications
- Labels are constructed of durable polyester designed to withstand UV exposure, outdoor use, water and abrasion
- Use thermal transfer resin ribbons shown on pages 4 and 5
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized; File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



C400X400A51



C400X400Y21




C200X400A51



C200X400Y21

Part Number	Width In. (mm)	Height In. (mm)	Description	Std. Pkg. Qty. (Roll)
C200X400A51	2.00 (50.8)	4.00 (101.6)	Polyester safety label, WARNING header orange and black, 250 labels per roll.	1
C200X400Y21			Polyester safety label, DANGER header red and white, 250 labels per roll.	
C400X400A51	4.00 (101.6)	4.00 (101.6)	Polyester safety label, WARNING header orange and black, 250 labels per roll.	
C400X400Y21			Polyester safety label, DANGER header red and white, 250 labels per roll.	
C400X600A51		6.00 (152.4)	Polyester safety label, WARNING header orange and black, 100 labels per roll.	
C400X600YX1			Polyester safety label, orange header, 100 labels per roll.	
C400X600Y21	Polyester safety label, DANGER header red and white, 100 labels per roll.			



C400X600YX1



C400X600Y21



C400X600A51

Order number of labels required in multiples of Standard Package Quantity

### Raised Panel Arc Flash Labels

- Super-Tack adhesive provides strong holding power for rough, textured, and powered-coated surfaces
- Meet ASTM G154 for outdoor durability (simulating 20 years of UV resistance under normal conditions but not all outdoor exposures)
- Meet ASTM D3389 standard for abrasion resistance, and also meets solar application standards
- Meets DIN 40050-9, IP69K for washdown applications
- Use thermal transfer resin ribbons shown on pages 4 and 5
- Temperature Range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979, cUL recognized, C22.2 No. 0.15.01, File # MH 14979




C400X400ANT

Part Number	Color	Width In. (mm)	Height In. (mm)	Description	Std. Pkg. Qty. (Roll)
C400X400ANT	Orange	4.00 (101.6)	4.00 (101.6)	Raised Panel Safety Label, WARNING header, White and Orange/Black	1
	White				

Order number of labels required in multiples of Standard Package Quantity

### Super-Tack Polyester Arc Flash Continuous Tapes

- Super-tack polyester has ultra-aggressive adhesive
- Ideal for rough, textured, and coated surfaces
- Meets DIN 40050-9, IP69K for washdown applications
- Use thermal transfer resin ribbons shown on pages 4 and 5
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized; File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979

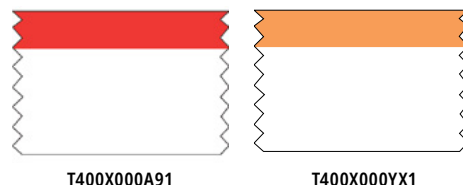

T400X000A91


T400X000YX1

Part Number	Width In. (mm)	Height Ft. (m)	Description	Std. Pkg. Qty. (Roll)
T400X000YX1	4.00 (101.6)	50.0 (15.2)	Polyester arc flash continuous tape, orange header.	1
T400X000A91			Polyester arc flash continuous tape, red header.	

Order number of labels required in multiples of Standard Package Quantity

### Super-Tack Polyester Facility Identification Labels

- Facility Identification created quickly to comply with workplace safety regulations contributing to the protection of employees and equipment from unexpected hazards
- Meets DIN 40050-9, IP69K for washdown applications
- Use thermal transfer resin ribbons shown on pages 4 and 5
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized; File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979

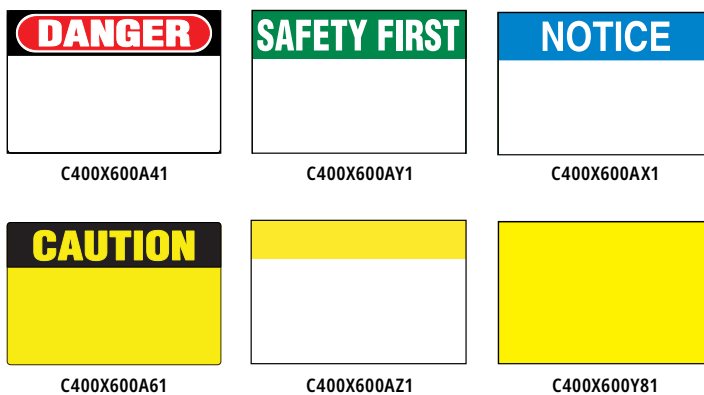

C400X600A41

C400X600AY1

C400X600AX1

C400X600A61

C400X600AZ1

C400X600Y81

Part Number	Width In. (mm)	Height In. (mm)	Description	Labels Per Row	Std. Pkg. Qty. (Roll)
C400X600A41	4.00 (101.6)	6.00 (152.4)	Polyester safety label, DANGER header, red and black/white, 100 labels per roll.	1	1
C400X600A61			Polyester safety label, CAUTION header, yellow/black, 100 labels per roll.		
C400X600AX1			Polyester safety label, NOTICE header, blue/white, 100 labels per roll.		
C400X600AY1			Polyester safety label, SAFETY FIRST header, green/ white, 100 labels per roll.		
C400X600AZ1			Polyester safety label, yellow header, 100 labels per roll.		
C400X600Y81			Polyester safety label, yellow, 100 labels per roll.		

Order number of labels required in multiples of Standard Package Quantity

### Raised Panel Solar Labels

- Print customized labels for solar applications
- Strong holding power for rough, textured, and coated surfaces
- Meet ASTM G154 for outdoor durability (simulating 20 years of UV resistance under normal conditions but not all outdoor exposures)
- Use thermal transfer resin ribbons shown on pages 4 and 5

- Temperature Range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979, cUL recognized, C22.2 No. 0.15.01, File # MH 14979



Part Number	Color	Width In. (mm)	Height In. (mm)	Labels Per Row	Std. Pkg. Qty.
C200X100AWT	Red	2.00 (50.8)	1.00 (25.4)	1	500
C300X250AWT		3.00 (76.2)	2.50 (63.5)		
C400X100AWT		4.00 (101.6)	1.00 (25.4)		

Order number of labels required in multiples of Standard Package Quantity

# Making the connections that matter.

We have the knowledge and experience to help you make the most of your infrastructure investment.

[panduit.com](https://panduit.com)



Let's connect  
[panduit.com/contact-us](https://panduit.com/contact-us)

**PANDUIT**<sup>®</sup>  
infrastructure for a connected world

